


First Name: _____ Last Name: _____

For full credit, you need to show your work neatly and box your answers.

- (10 PT.) Using AND, OR, and NOT gates, draw the logic diagrams for the following Boolean expressions without expanding or simplifying them.
 - $Y = (A' + B')C + B(A + C)$
 - $W = (A + B')(C + D')$
- (10 PT.) Write the Boolean expression equivalent to the following logic circuit. Do not simplify!

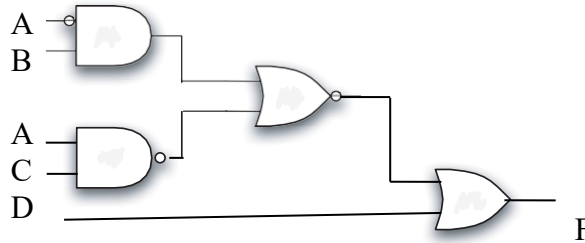

- (10 PT.) Write a truth table for

$$F(A, B, C) = (\overline{A + B})(B + \overline{C})$$

- (10 PT.) Find the dual of
 - $F = A'B + B'C' + D'$
 - $F(A, B, C) = (\overline{A + B})(B + \overline{C})$
- (10 PT.) Find the complement of
 - $F = A'B + B'C' + D'$
 - $F(A, B, C) = (\overline{A + B})(B + \overline{C})$
- (10 PT.) Demonstrate by means of truth tables the validity of the following identities
 - DeMorgan's law for three variables: $(X + Y + Z)' = X'Y'Z'$ and $(XYZ)' = X' + Y' + Z'$
 - $(X + Y)X = X$
- (25 PT.) Simplify the following Boolean expression as much as possible.
 - $ABC + A'B + ABC'$
 - $(X + Y)'(X' + Y')$
 - $(BC' + A'D)(AB' + CD')$
 - $X'YZ + XZ$
 - $XY + X(WZ + WZ')$
- (15 PT.) Reduce the following Boolean expression to the indicated number of literals:
 - $A'C' + ABC + AC'$ to three literals
 - $(A' + C)(A' + C')(A + B + C'D)$ to four literals
 - $A'B(D' + C'D) + B(A + A'CD)$ to one literal

Due Date: 2/24/2023